



19.6 cu ft French Door Refrigerator with
Strongbox™ Door Bins

MFB2055FRZ

Available Finishes/Colours

-  MFB2055FRW
White
-  MFB2055FRZ
FingerPrint Resistant Stainless Steel

Dimensions	
Depth	34 3/8
Height	68 3/8
Width	30 1/8

AHAM Volumes And Shelf Area	
Freezer Volume (Cu Ft)	6.34
Refrigerator Volume (Cu Ft)	13.34

Compatibility	
Connectivity	No
Works With	No

Details	
Cooling Type	Single Evaporator
Counter Depth	No
Door Style	Contour

Controls	
Control Type	Electronic
Air Filter Indicator/Reset	Yes

Controls	
Automatic Defrost	Yes
Verrouillage des commandes	No
LCD Touch Screen	No
Door Ajar/Open Alarm	Yes
Control Lockout	No
Control Location	Interior Up Front
Max Cool/Fast Cool	Yes
Water Filter Indicator/Reset	Yes

Configuration and Overview	
Counter Depth	No
Number of Doors	3

You can finally fit big French door benefits in your kitchen's slim 30" wide opening. In the space that was previously reserved for top freezers, this model offers Strongbox™ door bins that are 50x stronger than standard door bins, a full-width fold-away shelf for more organizational flexibility, LED interior lighting and a 10-year limited parts warranty on the compressor. Plus, there's a FreshFlow™ produce preserver that extends the freshness of produce by up to 25% and a FreshFlow™ air filter that's 15 times more effective than baking soda at reducing common food odours. In other words, all it takes to open up your entire kitchen is this flexible French door refrigerator.

- Top Features
- Fingerprint Resistant Stainless Steel
- Strongbox™ Door Bins
- 10-Year Limited Parts Warranty on the Compressor*

Manuals & Literature:

-  [Dimension Guide](#)
-  [Energy Guide](#)
-  [Use and Care Guide](#)
-  [Warranty Information](#)



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



Bottom Mount Refrigerator

PRODUCT MODEL NUMBER

MFB2055YE

MFB2055FR

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

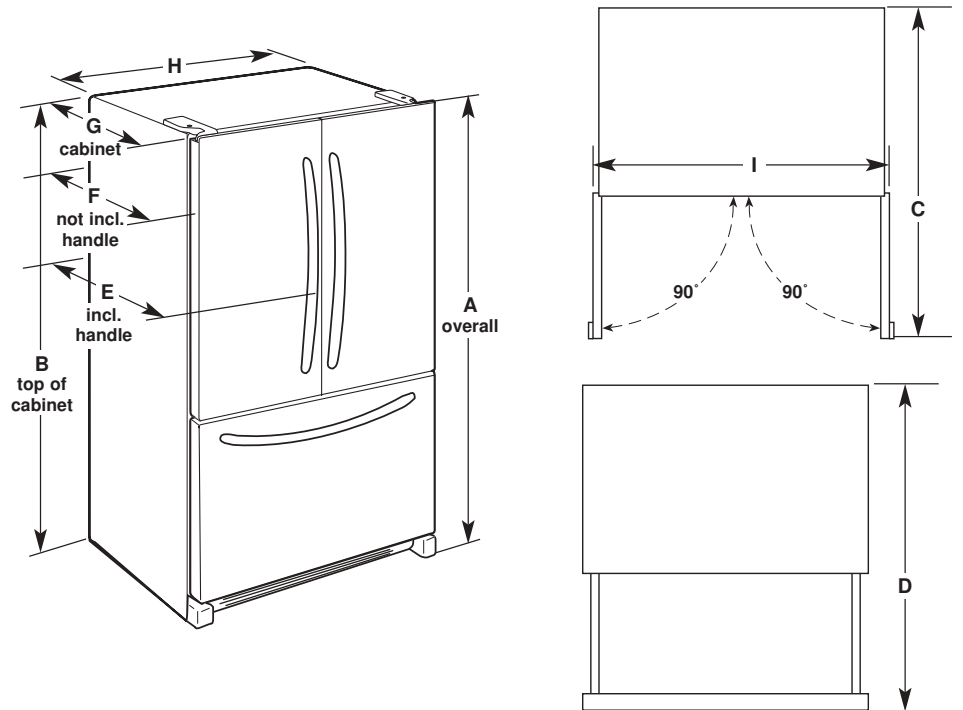

Model Number	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
MFB2055YE	19.6 cu. ft.	68 1/2" (174 cm)	67 1/2" (171.5 cm)	43 5/8" (110.8 cm)	51 11/16" (131.9 cm)	34 3/8" (88.3 cm)	31 11/16" (80.5 cm)	27 7/8" (70.8 cm)	29 1/2" (74.9 cm)	37 5/8" (95.6 cm)
MFB2055FR	19.7 cu. ft.	68 3/4" (173.7 cm)	67 1/2" (171.5 cm)	44 1/2" (112.1 cm)	52 1/2" (133.4 cm)	34 3/8" (87.3 cm)	32 1/4" (81.9 cm)	28" (71.1 cm)	30 1/2" (76.5 cm)	33 1/4" (84.5 cm)

LOCATION REQUIREMENTS

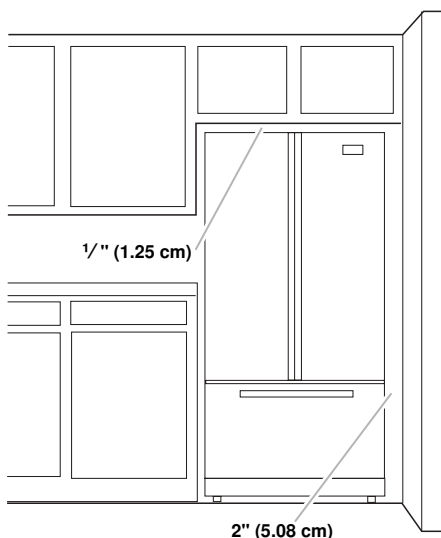

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space between the refrigerator and wall to allow the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.