

This 26.8 cu. ft. french door refrigerator helps fresh produce stay that way with the ExtendFresh™ Temperature Management System. A pull-out tray accommodates large platters with ease, while a FreshChill™ Temperature-Controlled Full-Width Pantry lets you optimize temperature and airflow for the specific food you're storing. The refined interior design features LED lighting, and metallic accents add Ac a touch of elegance.

## **Top Features** PrintShield<sup>™</sup> Finish

ExtendFresh<sup>™</sup> Temperature Management System

**Pull Out Tray** 

#### Manuals & Literature:

Dimension Guide

Energy Guide

Use and Care Guide warranty Information

# 26.8 cu. ft. 36-Inch Width Standard Depth French **Door Refrigerator with Exterior Ice and Water**

## **KRFF507HPS**

## Available Finishes/Colours

DimensionsDepth36 5/8Height69 7/8
Height 69 7/8
Width 35 11/16
AHAM Volumes And Shelf Area
Freezer Volume (Cu Ft) 7.77
Refrigerator Volume (Cu Ft) 19.03
Total Volume (Cu Ft) 26.8
Configuration and Overview
Advance Foam Insulation 99.9% lower Global Warming Potential and Better Energy Performance
Counter Depth No
Number of Doors 3

KRFF507HPS Stainless Steel with PrintShield™ Finish Compatibility Connectivity No Works With No Details Advance Foam Insulation 99.9% lower Global Warming Potential and Better Energy Performance Single Evaporator Cooling Type Counter Depth No Door Style Contour Controls Control Type Tap Touch Air Filter Indicator/Reset No Automatic Defrost Yes Verrouillage des commandes Yes

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

## PRODUCT MODEL NUMBER:

#### KRFF507H

### ELECTRICAL AND WATER REQUIREMENTS:

**Electrical:** A 115 volt, 60 Hz, AC only 15 or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, quali ed plumber.


**NOTE:** If the water pressure is less than what is required, the ow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.


### **Reverse Osmosis Water Supply**


**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

If a reverse osmosis water Itration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


#### **PRODUCT DIMENSIONS:**

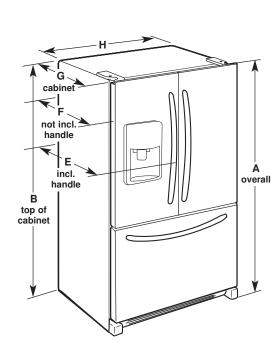

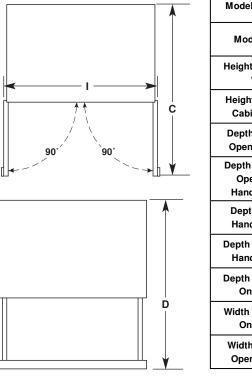

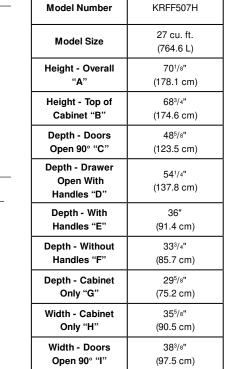

#### LOCATION REQUIREMENTS:

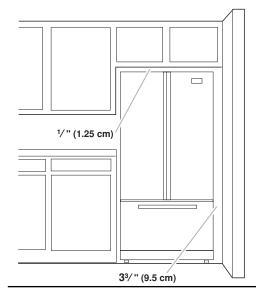

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a xed wall, leave a  $3^{3}/_{4}$ " (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of  $55^{\circ}F(13^{\circ}C)$  to a maximum of  $110^{\circ}F(43^{\circ}C)$ . The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between  $60^{\circ}F(15^{\circ}C)$  and  $90^{\circ}F(32^{\circ}C)$ . It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.