



33-Inch Wide French Door Refrigerator - 22 Cu. Ft.

MFF2258FEZ

Available Finishes/Colours

	MFF2258FEZ FingerPrint Resistant Stainless Steel
---	---

Dimensions	
Depth	34 7/16
Height	70
Width	32 5/8

AHAM Volumes And Shelf Area	
Freezer Volume (Cu Ft)	6.45
Refrigerator Volume (Cu Ft)	15.66

Configuration and Overview	
Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
Counter Depth	No
Number of Doors	3

Compatibility	
Connectivity	No

Compatibility	
Works With	No

Details	
Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
Cooling Type	Single Evaporator
Counter Depth	No
Door Style	Contour

Controls	
Control Type	Electronic
Air Filter Indicator/Reset	No
Automatic Defrost	Yes
Verrouillage des commandes	No

This Maytag® french door refrigerator is made with heavy-duty components and features that deliver the right kind of cold exactly where it's needed. Fingerprint resistant stainless steel keeps this fridge looking as good on the outside as it works on the inside. The temperature-controlled Wide-N-Fresh™ deli drawer provides the perfect place to keep deli items so they stay fresh longer. And when it comes to durability, this french door refrigerator has stainless steel handles to give you something hardy to grab on to, while the 10-year limited parts warranty on the compressor means you can count on it hold the cold for years.

Top Features

Humidity-Controlled FreshLock™ Crispers

BrightSeries™ LED Lighting

10-Year Limited Parts Warranty on the Compressor

- Manuals & Literature:
-  [Dimension Guide](#)

 [Energy Guide](#)

 [Use and Care Guide](#)

 [Warranty Information](#)



Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



## Bottom Mount Refrigerator

### PRODUCT MODEL NUMBERS

MFC2062  
MFF2258

MFF2558

**Electrical:** A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

**Water:** A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


**Reverse Osmosis Water Supply:** If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

### PRODUCT DIMENSIONS

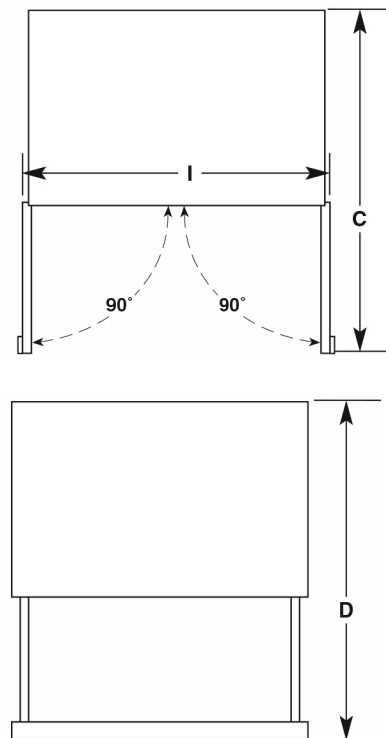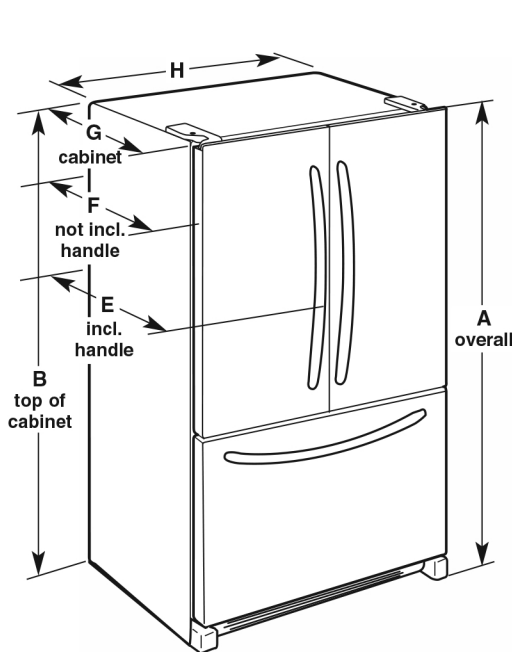

Model #	Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
MFC2062	20.0 cu.ft.	70 $\frac{1}{8}$ " (178.1 cm)	68 $\frac{1}{2}$ " (174.0 cm)	43 $\frac{1}{8}$ " (109.6 cm)	44 $\frac{1}{2}$ " (113.0 cm)	29 $\frac{3}{8}$ " (74.6 cm)	26 $\frac{7}{8}$ " (66.87 cm)	24 $\frac{1}{8}$ " (61.3 cm)	35 $\frac{5}{8}$ " (90.5 cm)	43 $\frac{3}{8}$ " (110.2 cm)
MFF2258	22.1 cu.ft.	70 $\frac{1}{8}$ " (178.1 cm)	68 $\frac{13}{16}$ " (174.8 cm)	47 $\frac{1}{16}$ " (119.6 cm)	51 $\frac{1}{8}$ " (129.9 cm)	34 $\frac{7}{16}$ " (87.5 cm)	31 $\frac{15}{16}$ " (81.1 cm)	28 $\frac{1}{8}$ " (71.4 cm)	32 $\frac{9}{8}$ " (82.9 cm)	40 $\frac{3}{8}$ " (102.6 cm)
MFF2558	25.2 cu.ft.	70 $\frac{1}{8}$ " (178.1 cm)	68 $\frac{3}{4}$ " (174.6 cm)	48 $\frac{1}{8}$ " (122.2 cm)	53 $\frac{1}{8}$ " (134.9 cm)	35 $\frac{1}{2}$ " (90.2 cm)	32 $\frac{7}{8}$ " (83.5 cm)	29 $\frac{1}{8}$ " (74.0 cm)	35 $\frac{5}{8}$ " (90.5 cm)	43 $\frac{3}{8}$ " (110.2 cm)

### LOCATION REQUIREMENTS

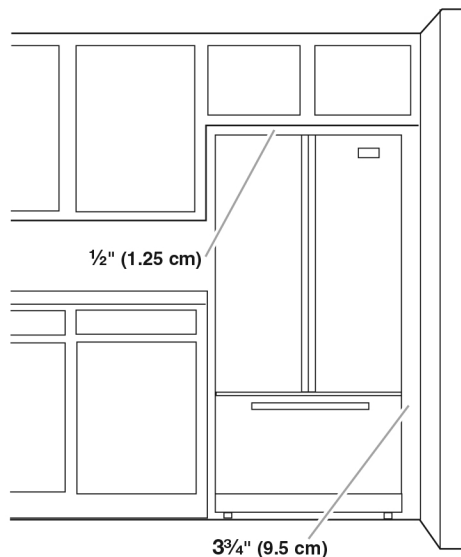

To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave  $\frac{3}{4}$ " (9.5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).