



Amana 4.0 cu. ft. Top-Load Washer with Dual Action Agitator

NTW4516FW

Available Finishes/Colours

<input type="checkbox"/>	NTW4516FW White
--------------------------	--------------------

Dimensions	
Depth	27
Height	42
Width	27 1/2

Exterior	
Lid/Door Finish	Painted
Window	No

Details	
Advanced Vibration Control™	No
Dispense System	Bleach,Detergent
Automatic Load Size Sensing Technology	Yes
Eco Monitor/Efficiency Monitor	No

Details	
Drum Material	Porcelain
Motor Horsepower	1/4 HP
Maximum Spin Speed (RPM)	700
Hoses Included	No
Wash Action	Agitator

Configuration and Overview	
Size (IN,inches)	27






Misc.	
Accessory Relationships	Yes
Home Delivery	Yes
Will Call	Yes

Features	
Sound Package	No
Pedestal Options	No

This 4.0 cu. ft. Amana® Top-Load Washer delivers a thorough, even clean with a Dual Action Agitator, which rolls clothes through the bottom of the wash basket. Its durable Porcelain Tub helps protect your favorites from snags, while the Deep Water Wash Option adds more water during the rinse cycle for added confidence.

- Top Features
- High Efficiency Agitator
- Porcelain Tub
- Large Capacity

Manuals & Literature:

-  [Dimension Guide](#)
-  [Energy Guide](#)
-  [Installation Guide](#)
-  [Use and Care Guide](#)
-  [Warranty Information](#)




Top-Loading Automatic Washer


PRODUCT MODEL NUMBERS

NTW4501X, NTW4601X, NTW4600Y, NTW4610Y, NTW4630Y, NTW4650Y, NTW4700Y, NTW4750Y, NTW4601B, NTW4611B, NTW4631B, NTW4651B, NTW4701B, NTW4605E, NTW4635E, NTW4655E, NTW4705E, NTW4755E, NTW4516F

Washer dimensions

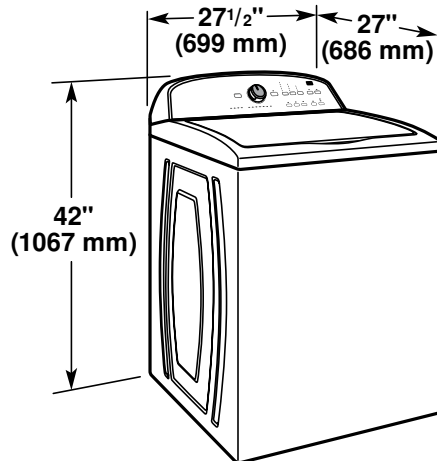

Recessed area or closet installation

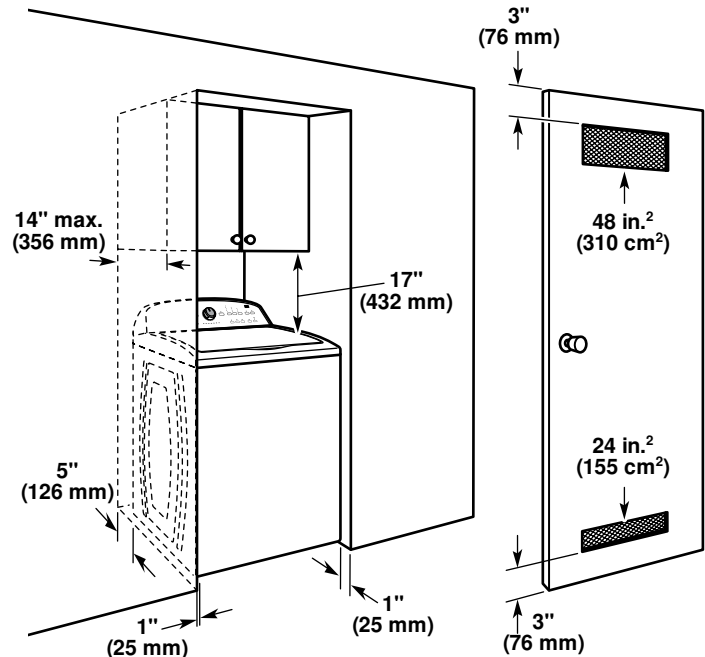

Dimensions show recommended spacing allowed, except for closet door ventilation openings which are minimum required. This washer has been tested for installation with spacing of 0" (0 mm) clearance on the sides. Consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and door moldings. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


ELECTRICAL REQUIREMENTS

A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

DRAIN SYSTEM


Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select method you need.

Floor standpipe drain system

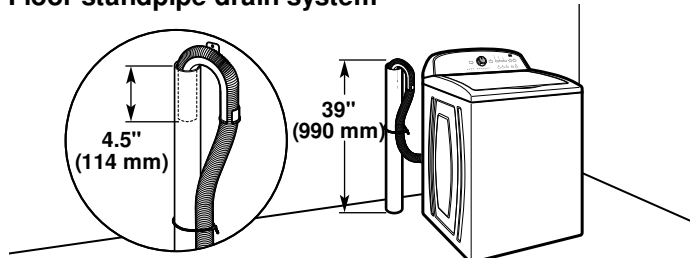


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. Top of standpipe must be at least 39" (990 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you must install higher than 96" (2.44 m), you will need a sump pump system.

Wall standpipe drain system

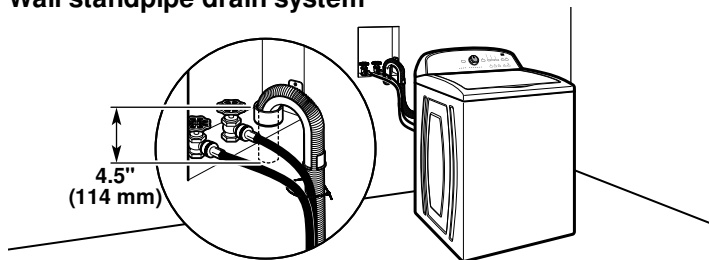


See requirements for floor standpipe drain system.

Floor drain system

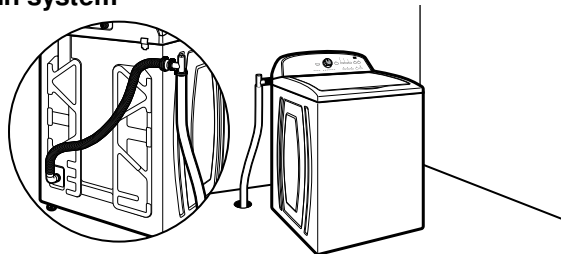

Floor drain system requires a Siphon Break Kit (Part Number 285834), 2 Connector Kits (Part Number 285835), and an Extension Drain Hose (Part Number 285863) that may be purchased separately. To order, please see toll-free phone numbers in your Use and Care Guide. Minimum siphon break: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Laundry tub drain system

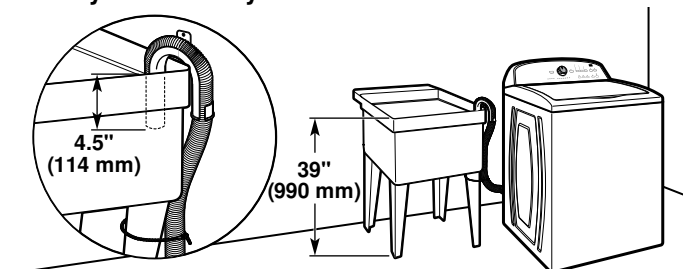

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 39" (990 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

IMPORTANT: To avoid siphoning, no more than 4.5" (114 mm) of drain hose should be inside standpipe or below the top of wash tub. Secure drain hose with cable tie.