



## 36-inch Wide French Door Refrigerator - 27 cu. ft.

WRF757SDHZ

### Available Finishes/Colours

WRF757SDHV  
Black Stainless

WRF757SDHZ  
FingerPrint Resistant Stainless Steel

### Dimensions

Depth	35 5/8
Height	69 7/8
Width	35 11/16

### AHAM Volumes And Shelf Area

Freezer Volume (Cu Ft)	7.77
Refrigerator Volume (Cu Ft)	19.03

### Configuration and Overview

Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
Counter Depth	No
Number of Doors	3

### Compatibility

Connectivity	No
--------------	----

### Compatibility

Works With	No
------------	----

### Details

Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
-------------------------	--

Cooling Type	Single Evaporator
--------------	-------------------

Counter Depth	No
---------------	----

Door Style	Contour
------------	---------

### Controls

Control Type	Tap Touch
--------------	-----------

Air Filter Indicator/Reset	No
----------------------------	----

Automatic Defrost	Yes
-------------------	-----

Verrouillage des commandes	Yes
----------------------------	-----

Get more room with purposeful storage spaces for the items you use most in this french door refrigerator with large freezer. Features such as the platter pocket, In-Door-Ice® storage, LED lights and a deli drawer make your family's favorites easy to fit and find. This ENERGY STAR® refrigerator also has a fingerprint-resistant exterior that resists smudges and easily wipes clean.

### Top Features

Fingerprint Resistant

Exterior Ice and Water Dispenser with EveryDrop® Filtration

Platter Pocket

### Manuals & Literature:

[PDF Dimension Guide](#) [PDF Energy Guide](#)

[PDF Use and Care Guide](#) [PDF Warranty Information](#)



# French Door Bottom Mount Refrigerator

## PRODUCT MODEL NUMBERS:

WRF757SDH, WRF767SDH

## ELECTRICAL AND WATER REQUIREMENTS:

**Electrical:** A 115 volt, 60 Hz, AC only 15 or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**Water:** A cold water supply with water pressure between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.



**NOTE:** If the water pressure is less than what is required, the flow of water from the water dispenser could decrease or ice cubes could be hollow or irregular shaped.

### Reverse Osmosis Water Supply

**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


If a reverse osmosis water filtration system is connected to your home cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

## PRODUCT DIMENSIONS:

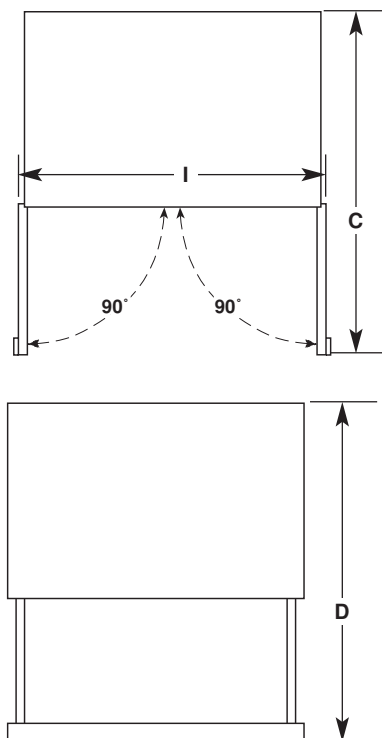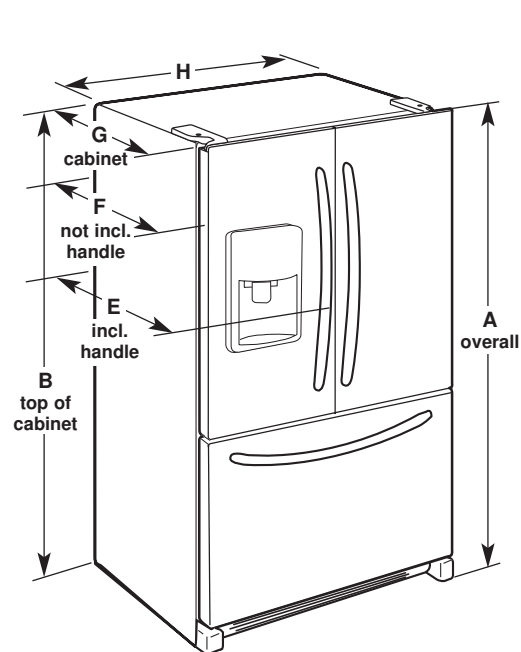

<b>Model Numbers</b>	WRF757SDH, WRF767SDH
<b>Model Size</b>	27 cu. ft. (764.6 L)
<b>Height - Overall "A"</b>	70 <sup>1</sup> / <sub>8</sub> " (178.1 cm)
<b>Height - Top of Cabinet "B"</b>	68 <sup>3</sup> / <sub>4</sub> " (174.6 cm)
<b>Depth - Doors Open 90° "C"</b>	48 <sup>5</sup> / <sub>8</sub> " (123.5 cm)
<b>Depth - Drawer Open With Handles "D"</b>	54 <sup>1</sup> / <sub>4</sub> " (137.8 cm)
<b>Depth - With Handles "E"</b>	36" (91.4 cm)
<b>Depth - Without Handles "F"</b>	33 <sup>3</sup> / <sub>4</sub> " (85.7 cm)
<b>Depth - Cabinet Only "G"</b>	29 <sup>5</sup> / <sub>8</sub> " (75.2 cm)
<b>Width - Cabinet Only "H"</b>	35 <sup>5</sup> / <sub>8</sub> " (90.5 cm)
<b>Width - Doors Open 90° "I"</b>	38 <sup>3</sup> / <sub>8</sub> " (97.5 cm)

## LOCATION REQUIREMENTS:

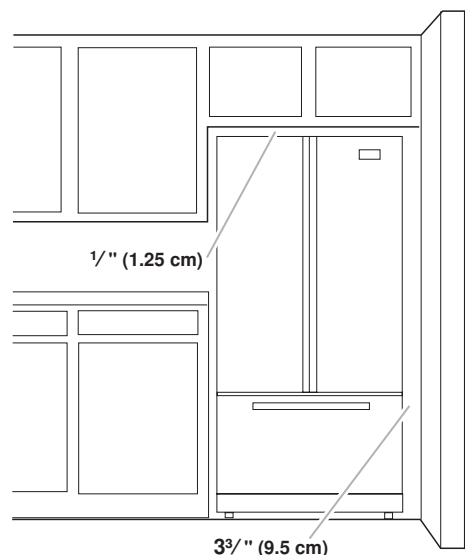

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) of space on each side and at the top. Allow for a 1" (2.54 cm) space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 3<sup>3</sup>/<sub>4</sub>" (9.5 cm) minimum space between the refrigerator and wall to allow the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.