



## Whirlpool® 36-inch Wide Side-by-Side Refrigerator - 25 cu. ft.

WRS315SNHM

### Available Finishes/Colours

WRS315SNHW  
White

WRS315SNHM  
Monochromatic Stainless  
Steel

WRS315SNHB  
Black

Dimensions		Exterior	
Depth	33.63	Handle Type	Reach Through Handle
Height	69.63	Base Grille Color	Grey
Width	35.88	Cabinet Color	Grey

Controls		Exterior	
Control Location	Interior Up Front	Cabinet Finish	Textured
Control Type	Electronic	Door Finish	Smooth
Control Lockout	No	Door Style	Contour
Door Ajar Open Alarm	No	Hidden Hinge	Yes
Max Cool Fast Cool	No	Number Of Doors	2
		Reversible Door	N/A

Specifications		AHAM Volumes And Shelf Area	
Country Of Origin	Mexico	Freezer Volume Cu Ft	9.61
Optional Accessories	W11510803	Refrigerator Volume Cu Ft	15.46
Fingerprint Resistant	No	Total Volume Cu Ft	25.1

Exterior		Configuration	
Handle Color	Stainless Steel	Installation Configuration	Freestanding

Purposefully-designed storage spaces help you fit and find it all. Get increased loading flexibility with adjustable gallon door bins. LED lights keep food looking as good as it tastes while electronic controls make it easy to adjust your refrigerator whenever it's needed.


### Top Features

Adjustable Gallon Door Bins

LED Interior Lighting

Hidden Hinges

### Manuals & Literature:

-  [Dimension Guide](#)
-  [Energy Guide](#)
-  [Installation Guide](#)
-  [Owner Manual](#)
-  [Warranty Information](#)

# Whirlpool® Side by Side Refrigerator

## PRODUCT MODEL NUMBERS


WRS315SDH\*    WRS315SNH\*  
WRS312SNH\*    WRS335SDH\*  
WRS331SDH\*    WRS311SDH\*  
WRS321SDH\*    WRS555SIH\*  
WRSA15SNH\*    WRS325SDH\*

**Electrical:** A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**Water:** A cold water supply with water pressure of between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

**Reverse Osmosis Water Supply:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

## LOCATION REQUIREMENTS

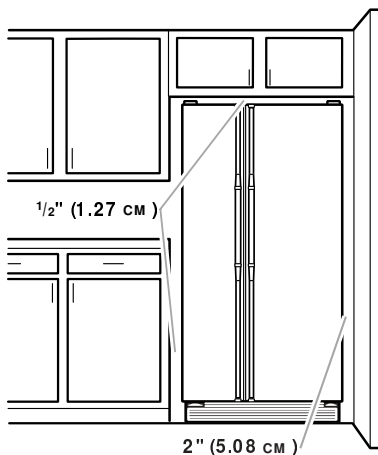


To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.

### NOTES:

- This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.
- Normal minimum cabinet cutout width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.

**PRODUCT DIMENSIONS**

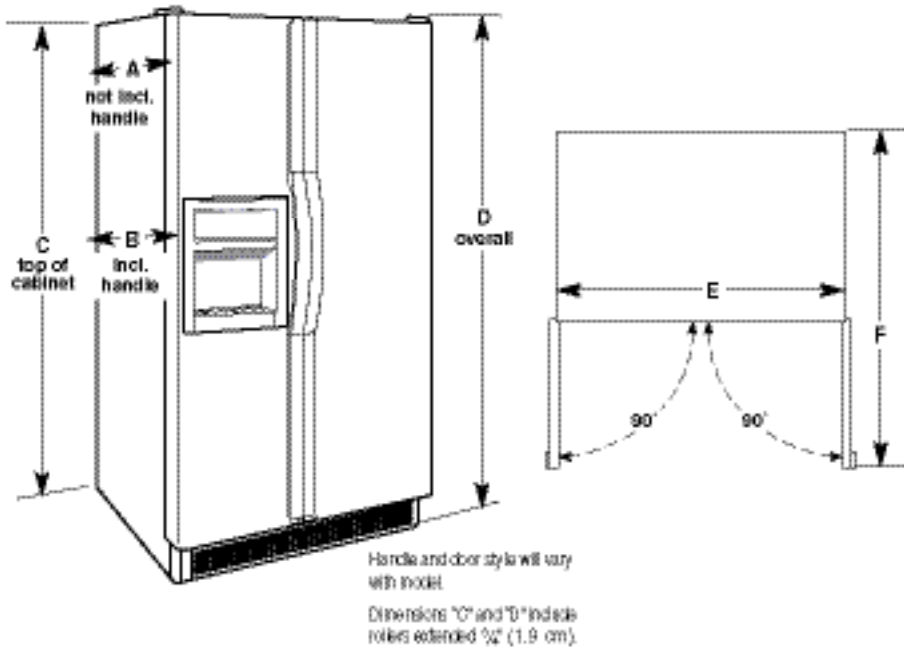

Model Number/ Capacity	Depth Without Handles "A"	Depth With Handles "B"	Height to top of Cabinet "C"	Overall height "D"	Cabinet Width "E"	Depth with Doors Open 90° "F"
WRS315SDH* 24.57 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	68 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	69 <sup>5</sup> / <sub>8</sub> " (176.85 cm)	35 <sup>7</sup> / <sub>8</sub> " (90.11 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS315SNH* 25.1 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	68 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	69 <sup>5</sup> / <sub>8</sub> " (176.85 cm)	35 <sup>7</sup> / <sub>8</sub> " (90.11 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS312SNH* 21.55 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	65 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	66 <sup>5</sup> / <sub>8</sub> " (169.23 cm)	32 <sup>3</sup> / <sub>4</sub> " (84.12 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS335SDH* 24.54 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	66 <sup>5</sup> / <sub>8</sub> " (169.23 cm)	69 <sup>5</sup> / <sub>8</sub> " (176.85 cm)	35 <sup>7</sup> / <sub>8</sub> " (90.11 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS311SDH* 21.42 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	65 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	66 <sup>5</sup> / <sub>8</sub> " (169.23 cm)	32 <sup>3</sup> / <sub>4</sub> " (84.12 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS321SDH* 21.40 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	65 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	66 <sup>5</sup> / <sub>8</sub> " (169.23 cm)	32 <sup>3</sup> / <sub>4</sub> " (84.12 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS555SIH 24.51 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	68 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	69 <sup>5</sup> / <sub>8</sub> " (176.85 cm)	35 <sup>1</sup> / <sub>2</sub> " (90.18 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRSA15SNH* 25.1 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	68 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	69 <sup>5</sup> / <sub>8</sub> " (176.85 cm)	35 <sup>7</sup> / <sub>8</sub> " (90.11 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS331SDH* 21.42 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	65 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	66 <sup>5</sup> / <sub>8</sub> " (169.23 cm)	32 <sup>3</sup> / <sub>4</sub> " (84.12 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)
WRS325SDH* 22.50 cu. ft.	31 <sup>5</sup> / <sub>8</sub> " (80.33 cm)	33 <sup>5</sup> / <sub>8</sub> " (85.41 cm)	68 <sup>5</sup> / <sub>8</sub> " (174.31 cm)	69 <sup>5</sup> / <sub>8</sub> " (176.85 cm)	35 <sup>7</sup> / <sub>8</sub> " (90.11 cm)	49 <sup>5</sup> / <sub>16</sub> " (125.25 cm)